

# MAMBA™

## SERIES



### MAMBA™

The New Way® Mamba™ slithers its way into routes other trucks can't and still delivers a menacing bite. With its slender body construction, the Mamba™ plays a big role and has the ability to transfer compacted materials to larger Rear Loaders. Available in fixed body mount, the Mamba™ also features cart tipper and barrel dumper options sure to strike fear into the competition.



a quality product of  **McLaughlin** TRUCK COMPANIES · P.O. Box 336 · 101 State Street · Scranton, IA 51462 · T 800 831 1858 · F 712 652 3399 · [www.newwaytrucks.com](http://www.newwaytrucks.com)

# MAMBA™ SPECIFICATIONS

## GENERAL SPECIFICATIONS (STANDARD)

Model	HB 600	HB 800	HB 1000
Body Capacity	6 yd <sup>3</sup>	8 yd <sup>3</sup>	10 yd <sup>3</sup>
Hopper Capacity	1.5 yd <sup>3</sup>	1.5 yd <sup>3</sup>	1.5 yd <sup>3</sup>
Body Width (A)	90"	90"	90"
Body Length (B)	132"	165"	188"
Body Height (C)	79"	79"	79"
*Approx. Body Weight	4,560 lbs.	5,350 lbs.	6,050 lbs.
Average Compaction	600-800 lb./yd	600-800 lb./yd	600-800 lb./yd

## HYDRAULIC CYLINDER SPECIFICATIONS (STANDARD)



Model	HB 600	HB 800	HB 1000
Packing/Ejection Cylinder (1) 4-Stage Telescopic	6.5"	6.5"	6.5"
Tailgate Cylinders (2)	3.5"	3.5"	3.5"
Body Lift Cylinders (2)	3.5"	3.5"	3.5"

## MINIMUM CHASSIS SPECIFICATIONS (STANDARD)

Model	HB 600	HB 800	HB 1000
**Total GVWR	17,000 lbs.	18,000 lbs.	20,700 lbs.
Cab to Axel	84"	108"	133"

\*Approximate Body Weight empty and exclusive of options

\*\*Any Chassis sent to Scranton Manufacturing with less than the minimum guideline requirements will not be mounted.  
(Chassis must be capable of carrying the net weight of the body plus the weight of the refuse collected.)

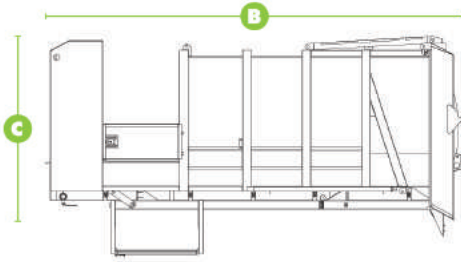

## BODY CONSTRUCTION

	US	Metric
- Sides	12 GA 38K	2.66 mm
- Roof	12 GA 38K	2.66 mm
- Floor (upper)	10 GA 50K	3.42 mm
- Floor (lower)	7 GA 36K	6.35 mm
- Tailgate	10 GA 50K	3.42 mm
- Hopper Floor (back)	1/4" 50K	6.35 mm

## HYDRAULIC SYSTEMS

- Operating Pressure	1,800 PSI	12,410 KPA
- Min. Accept. Oil Flow	17 GPM	64 LPM
- Recommended Oil Flow	20 GPM	75 LPM
- Oil Reservoir	24 gal	91 L
- Packer Cycle Time	19 sec	
- Hydraulic Hoses	4 to 1 Burst	
- Spin On Hydraulic Filter	10 micron	
- Engine RPM	1,275-1,550	

All models and specifications subject to change.  
Visit us online at [newwaytrucks.com](http://newwaytrucks.com) for the latest updates.

## STANDARD EQUIPMENT

- Auto-Lock Tailgate
- Back Up Alarm
- LED Lights
- Manual Packing Controls
- Sight Gauge on Oil Tank
- Pressure Gauge
- Prime Paint
- Chrome Cylinders
- Tailgate Ajar Indicator
- Steps
- Color Rear Vision Camera

## OPTIONAL EQUIPMENT

- Accelerator Kit
- Automatic Cycling
- Finish Paint-Imron Elite
- 2 Wheel Cart Tipper
- 55 Gal Barrel Lift
- PTO & Pump
- Special Lighting
- Rear Vision Camera System
- Upper Access Doors
- Hopper Roof Cover
- CNG Powered

**AUTHORIZED DEALER**



a quality product of **McLaughlin** FAMILY COMPANIES

P.O. Box 336 · 101 State Street · Scranton, IA 51462

T 800 831 1858 · F 712 652 3399 · [www.newwaytrucks.com](http://www.newwaytrucks.com)