

MAMMOTH™

WESTERN SERIES




MAMMOTH™
Western Series

When size matters, the New Way Western Series Mammoth™ trumps the competition. With over 10% less weight, The WS Mammoth™, still packs it all with the same superior strength. Equipped with high-strength steel heavy duty arms and torque tube assembly, the Mammoth™ is stomping the industry with brute force.



A Product of **Scranton Mfg. Co., Inc.** · 101 State Street · Scranton, IA 51462 T 800 831 1858 · F 712 652 3399 · www.newwaytrucks.com

WESTERN SERIES MAMMOTH™ SPECIFICATIONS

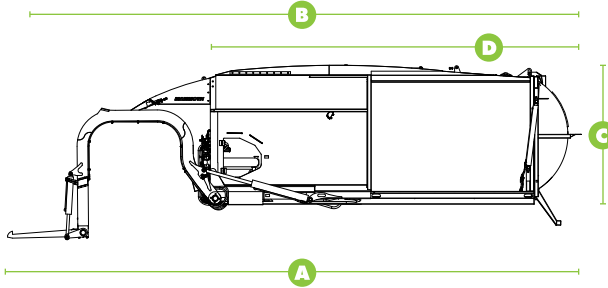

GENERAL SPECIFICATIONS (STANDARD)

Model	34	37	40	43
Body Capacity	22 yd ³	25 yd ³	28 yd ³	31 yd ³
Hopper Capacity	12 yd ³	12 yd ³	12 yd ³	12 yd ³
Body Width	102"	102"	102"	102"
Body Length Overall (A)	410"	430"	446"	466"
Body Length Arms Down (B)	369"	389"	405"	425"
Body Height Arms Down (C)	110"	110"	110"	110"
Body Height Tailgate Raised	138.5"	138.5"	138.5"	138.5"
Body Height Arms Stowed (D)	119.75"	119.75"	119.75"	119.75"
Body Length (D)	258"	277.5"	294"	313.5"
*Approx. Body Weight	15,370 lbs.	15,500 lbs.	16,370 lbs.	16,500 lbs.

HYDRAULIC CYLINDER SPECIFICATIONS (STANDARD)

Model	34	37	40	43
Pack Cylinders 3-Stage (2)	5.5"	5.5"	5.5"	5.5"
Arm Cylinder (2)	4.5"	4.5"	4.5"	4.5"
Fork Cylinder (2)	3.5"	3.5"	3.5"	3.5"
Hopper Cover Cylinder	2.5"	2.5"	2.5"	2.5"
Tailgate Cylinder	3"	3"	3"	3"

MINIMUM CHASSIS SPECIFICATIONS (STANDARD)

Model	34	37	40	43
Wheelbase	172-174"	172-174"	208-210"	208-210"
Cab to Trunion	147-149"	147-149"	183-185"	183-185"
Front Axle	20,000 lbs.	20,000 lbs.	20,000 lbs.	20,000 lbs.
Rear Axle	40,000 lbs.	40,000 lbs.	40,000 lbs.	40,000 lbs.
Total GVWR	60,000 lbs.	60,000 lbs.	60,000 lbs.	60,000 lbs.

*Approximate Body Weight empty and exclusive of options

BODY CONSTRUCTION

- Body Sides	10 GA	HARDOX 450
- Body Roof	10 GA	80K
- Body Floor	10 GA	HARDOX 450
- Hopper Sides (lower)	7 GA	HARDOX 450
- Hopper Sides (upper)	10 GA	80K GR
- Hopper Floor	1/4"	HARDOX 450
- Packer Plate (lower)	1/4"	AR235 GR
- Packer Plate (upper)	3/16"	80K GR
- Tailgate	10 GA	HARDOX 450
- Forks	1.25"	100K
- Arm Sides	.25"	100K
- Arm Wrap	.5" x 3" flat	100K
- Arm Lift Capacity	6,500 lbs.	
- Sliding Hopper Cover	Expanded steel	

HYDRAULIC SYSTEMS

	US	Metric
- Operating Press.	2,250 PSI	16,892 KPA
- Pump Flow	55 GPM	189 LPM
- Packing Force	106,912 lbs.	

All models and specifications subject to change.

Visit us online at newwaytrucks.com for the latest updates.

HYDRAULIC SYSTEMS (Cont.)

- Packer Cycle Time	21 seconds
- Loader Arm Cycle	12 seconds
- Hydraulic Hoses	4 to 1 burst
- Dual Spin On Return Filters	10 Micron Absolute

STANDARD EQUIPMENT

- Full Ejection Body
- Auto-Lock Tailgate
- Dual Lever Controls
- Denison Long Life Pump
- LED Lights
- Automatic Packer
- Curved Shell Body
- Finish Paint - White - Imron 5000
- Sliding Hopper Cover Door
- Slide Access Door
- 21 Gallon Sump
- Body Side Ladder
- Rear Vision Camera System
- Mounting
- Pack on The Go
- Dual Sump Clean-Out Doors

OPTIONAL EQUIPMENT

- 8,000 lbs. Arm Capacity
- Service Host
- Dump Body
- Outside Controls
- Pressure Line Filter
- Special Lighting
- Washout Tank
- Color Code Paint

AUTHORIZED DEALER



A Product of **Scranton Mfg. Co., Inc.** · 101 State Street · Scranton, IA 51462

T 800 831 1858 · F 712 652 3399 · www.newwaytrucks.com